

# **Professional HD Integrated Receiver Decoder**

## **User Manual**

# Preface

## About This Manual

This manual provides introduction to users about how to operate the device correctly. The content includes introduction to product installation, product characteristics and product settings, etc. It is highly suggested that users should read this document before actually operating the device.






## Intended Readers

This manual is suggested to be studied by the following readers:

- Technical Service Engineer
- Maintenance Engineer
- Test Engineer
- Sales Engineer

## Symbols Definition

For the symbols that might appear in this document, the meanings they represent are as the following:

Symbol	Meaning
	There is highly potential danger. If it cannot be avoided, it will lead to the deaths or serious injury.
	There is medium or low potential danger. If it cannot be avoided, it will lead to medium or slight injury.
	There are potential risks. If ignore these texts, it may cause damage to the device, data loss, equipment performance reduce or unpredictable results.
	Tips that help you to solve problems or save your time.
	Remarks. Additional information to the text, in order to emphasize something.

# Contents

1	About This Product.....	4
	1.1 Introduction.....	4
	1.2 Safety.....	4
	1.3 Architecture.....	5
	1.4 Methods of Operation.....	6
	1.4.1 Operation through WEB UI.....	6
	1.4.2 Operation through Front Panel Operation.....	7
	1.5 Technical Specifications.....	7
	1.5.1 Physical Specifications.....	7
	1.5.2 Performance and Capacity.....	8
	1.5.3 Interfaces and Protocols.....	8
2	Installation.....	10
	2.1 Installation Procedure.....	10
	2.2 Preparation before Installation.....	10
	2.3 Check Package and Accessories.....	11
	2.4 Equipment Wiring and Connection.....	11
	2.4.1 Connection Setup for RF Signal Input.....	12
	2.4.2 Connection Setup for ASI signal input.....	12
	2.4.3 Connection Setup for IP signal input.....	12
3	Operation Guide.....	13
	3.1 Operation Overview.....	13
	3.2 Powering Up and Initialization.....	13
	3.3 Front Panel Operation.....	13
	3.3.1 Front Panel Menu Structure.....	14
	3.3.2 Front Panel Operation Guide.....	16
	3.4 WEB UI Operation (Recommended).....	17
	3.4.1 WEB Management Connecting.....	17
	3.4.2 Parameters Configuration.....	19

3.5	Preparation before Officially Operation.....	36
3.5.1	Clear all useless data.....	37
3.5.2	Configure the equipment with working data.....	37
3.5.3	Full checking before implementation.....	37
4	FAQ.....	38
5	Terminology.....	40

# **1 About This Product**

## **1.1 Introduction**

This product is a new generation integrated receiver decoder to support the growing demands for multi-format, multi-standard video delivery and distribution. It can receive digital signals from several inputs (DVB-S/S2, DVB-C (optional), DVB-T/T2/ISDB-T (optional) and ASI), decrypt and process/select programs to various outputs including CVBS, HDMI, SD/HD SDI and ASI. It supports multi-channel descrambling, multiplexing, external table/data insertion, transcoding and transmodulating. It also supports video decoding with two audio channels. With remote web-based management interface, it is ideal to support advanced application such as content distribution, real-time signal conversion and transmission.

## **1.2 Safety**

- To avoid electric-shock hazards, do not open the receiver; refer service to qualified personnel only.
- Do not expose the device in the sunlight, and keep it away from the heat source.
- Do not block ventilation holes of the device so that air can circulate freely.
- Switch the device off whenever it remains out of service for an extended period.
- Be sure to turn the device off and disconnect the AC power cord before cleaning the receiver surface.
- The apparatus shall be connected the mains socket outlet with a protective earthing connection
- The appliance coupler used as the disconnect device shall remain readily operable.
- This product has gone through regulated EMC test and meets with EMC safety requirement.



(REMARKS **Such tests are conducted in a controlled EMC environment. A controlled EMC environment exists in a building where the installation has been designed**


having special regards to EMC, and where technical personnel are present with experience of EMC technology.)

## 1.3 Architecture



The equipment of this section is shown in schematic diagram. It is subject to change for improvement on the real product without advanced notice.


### Front Panel

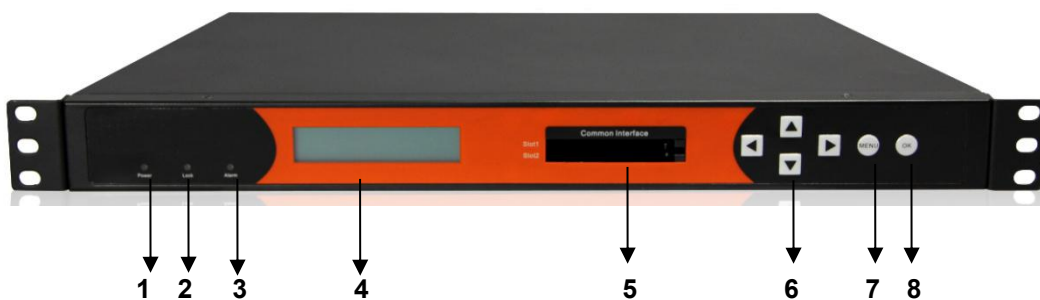

PIC-1.3-1

1. **Power status indicator:** This LED light is turned on when the IRD is power on.
2. **(Signal) Lock status indicator:** This LED light is turned on when a channel is locked. Otherwise there is no channel locked.
3. **Alarm status indicator:** This LED flickers when there is something abnormal. For example, the strength of the input signal is too weak.
4. **Display screen:** This LCD screen can show the program and configuration information.
5. **CI SLOTS:** There are two CI slots for various CAS CAM (PCMCIA) modules.
6. **KEY PADS:**
  - **Up/Down/Left/Right arrow keys:** To change channels, to adjust volumes and configure the IRD.
  - **Menu:** To enter the menu and the quit function of the sub menus.
  - **OK:** To confirm the operation in the setup.

## Rear Panel

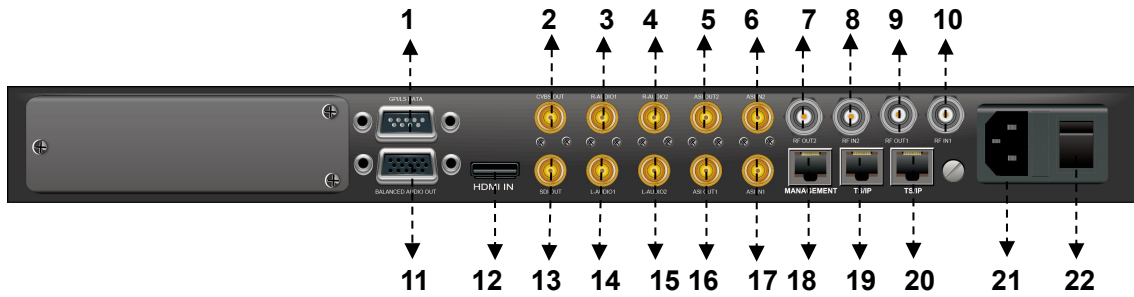

PIC-1.3-2

1	GPI/LS DATA Out	2	CVBS Out
3	R-AUDIO1	4	R-AUDIO2
5	ASI OUT2	6	ASI IN2
7	RF OUT2	8	RF IN2
9	RF Out1	10	RF IN1
11	BALANCED AUDIO OUT	12	HDMI
13	SDI OUT	14	L-AUDIO1
15	L-AUDIO2	16	ASI OUT1
17	ASI IN1	18	MANAGEMENT
19	TS/IP	20	TS/IP (Redundant)
21	POWER CORD IN	22	POWER SWITCH Redundant POWER (Optional)

## 1.4 Methods of Operation

### 1.4.1 Operation through WEB UI

Operate the IRD remotely through WEB UI. The WEB UI operation supports:

Functions	Description	Related Items
Parameters Setting	WEB UI allows users to conduct operations of parameters configuration, modification and setup.	Signal receive setup CI setup Decoder setup

Functions	Description	Related Items
Status Monitoring	Support real-time monitoring on running status of input signal, CI descrambling, etc.	RF signal strength indication CI slot/CAM information HW/SW version information
Upgrade	Support unit upgrade through WEB UI	

## 1.4.2 Operation through Front Panel Operation

Operation through front panel control buttons; users can configure all the parameters as the followings:

Functions	Description	Related Items
Parameters Setting	Allows users to conduct operations of parameters configuration, modification and setup.	Signal receive setup CI setup Decoder setup
Status Monitoring	Support real-time monitoring on running status of input signal, CI descrambling, etc.	RF signal strength indication CI slot/CAM information HW/SW version information

## 1.5 Technical Specifications

### 1.5.1 Physical Specifications

Items	Index
Power	AC100~240VAC
Max. Power Consumption	Approx 40W
Size	1RU
Dimension	480mm (W) × 44mm (H) × 440mm (D)
Net Weight	Approx 3.8Kg
Gross Weight	Approx 5Kg



## 1.5.2 Performance and Capacity

Items	Index
ASI Max. Input Bitrate	100Mbps
ASI Max. Output Bitrate	100Mbps
Decoder Max. Resolution	1920 X 1080i
CI Max. Output Bitrate	100Mbps

## 1.5.3 Interfaces and Protocols

Inputs	IP input	ASI input
	Interface: 1 x 1000 Mbps	Interface: 2 ASI inputs, 75Ω
	IP Encapsulation: UDP/RTP	MPEG Format: 188/204 Bytes per TS
	MPEG TS: MPTS and SPTS	Max bit rate: 100 Mbps
	Input processing: Up to 2 channels, max at 72 Mbps per channel.	Support input redundancy.
	DVB-T2 (Optional)	DVB-T (Optional)
	Constellation: 16/32/64/128/256 QAM	Constellation: QPSK/16/64QAM
	Bandwidth: 1.7Mhz, 5Mhz, 6Mhz, 7Mhz, 8Mhz, 10Mhz	Bandwidth: 6/7/8Mhz
	Input frequency: 48~862MHz	Input frequency: 48~862MHz
	Max. bitrate: 50Mbps	Max. bitrate: 31.67Mbps
	Transmission mode: 1K, 2K, 4K, 8K, 16K, 32K	Transmission mode: 2K, 8K
	DVB-S/S2	DVB-C (Optional)
	Input Frequency: 950~2150 MHz	Frequency: 48~862 MHz
	Constellation: QPSK, 8 PSK	Constellation: 16/32/64/128/256 QAM
	ISDB-T/Tb (Optional)	ATSC (Optional)
	Constellation: QPSK/16/64QAM DQPSK	Constellation: 8VSB
	Bandwidth: 1.7Mhz, 5Mhz, 6Mhz, 7Mhz, 8Mhz, 10Mhz	Bandwidth: 6Mhz
	Input frequency: 48~862MHz	Input frequency: 57~803MHz (fixed)
	Transmission mode: 1K, 2K, 4K,	Max bitrate: 19.39Mbps


	8K, 16K, 32K	
<b>Outputs</b>	<b>IP output</b>	<b>ASI output</b>
	Interface: RJ45	Interface: 2 ASI outputs, 75Ω
	IP Encapsulation: UDP/RTP	MPEG Format: 188/204 Bytes per TS
	MPEG TS: MPTS and SPTS	Max bit rate: 100 Mbps
	Output processing: Up to 2 channels, max at 72 Mbps per channel, support TS/IP redundancy.	



**REMARKS** The physical connector design is subject to change without advanced notice (either the connector type or specific connector location) according to user's specific order, performance improvement, or for better user experience.

## **2 Installation**

### **2.1 Installation Procedure**

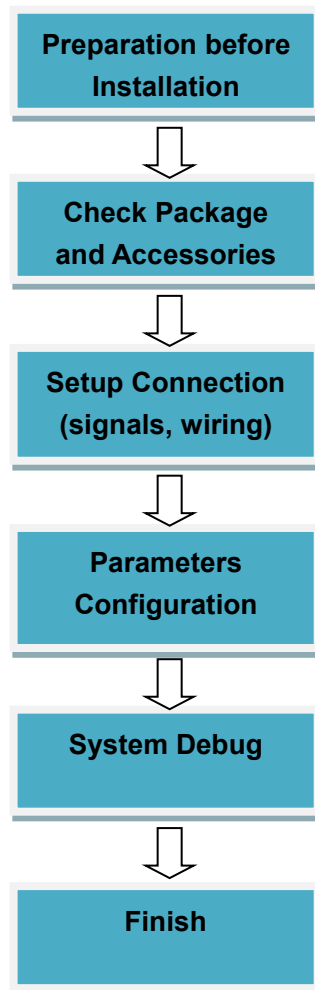

### **2.2 Preparation before Installation**

Before installation, the installation personnel should read through and confirm the followings:

- Go through this user manual.
- Has the knowledge of digital television system.
- Has defined the sources, racks allocation, and set-up plan system wiring.
- Knows how to operate this unit and parameters configuration.
- Go through related engineering design documents about the system.

## 2.3 Check Package and Accessories

The IRD package includes the following accessories:


- Base Unit x1
- Power cord x1
- Earth cord x1
- BNC cord x1
- BNC-RCA cord x2
- User Guide Disc x1

## 2.4 Equipment Wiring and Connection



**ATTENTION** To avoid electric shock and damage to the equipment, before setting up the wiring connection, please power off the equipment and all other connected external devices. The equipment and external devices must be grounded. Powering on the equipment only after all the wiring connection is completed.

### Connection Diagram

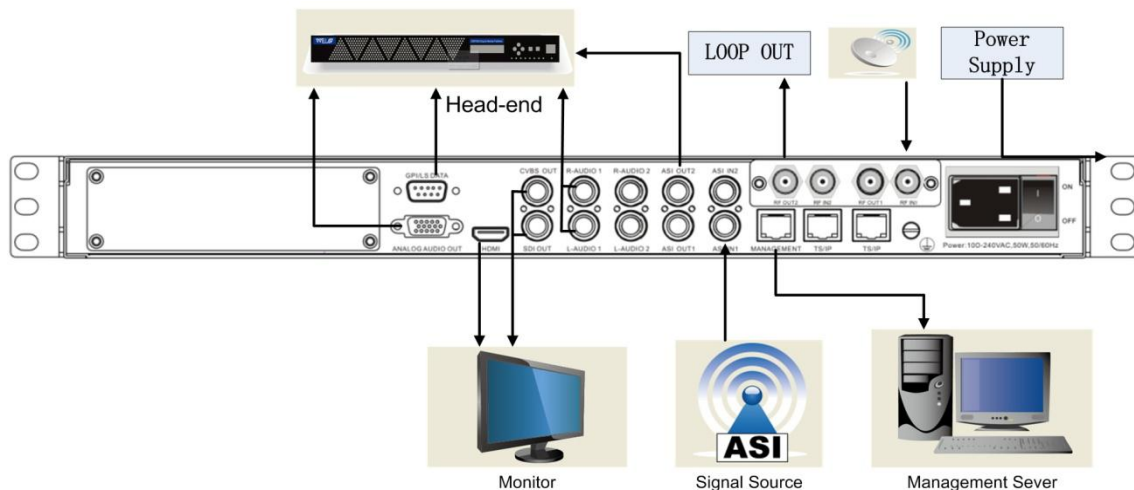

PIC-2.4-1



TIPS

In actual application, not all connection interfaces need to be connected with signal/external devices. Please connect according to actual application purpose.



REMARKS

To ensure a smooth communication between the management PC and the IRD, please try to connect the IRD management port to a switch without large data processing.

### **2.4.1 Connection Setup for RF Signal Input**

- Connect signal to tuner input (either RF1 or RF2 input) with a RF cable.
- Connect the IRD “Management” port to a switch, set up a management network with the management PC.
- Connect the IRD with the monitor via HDMI, SDI or CVBS ports.

### **2.4.2 Connection Setup for ASI signal input**

- Connect ASI signal to IRD “ASI IN” port with a BNC cable.
- Connect the IRD “Management” port to a switch, set up a management network with the management PC.
- Connect the IRD with the monitor via HDMI, SDI or CVBS ports.

### **2.4.3 Connection Setup for IP signal input**

- Connect IP signal to IRD “TS/IP” port with a twisted cable.
- Connect the IRD “Management” port to a switch, set up a management network with the management PC.
- Connect the IRD with the monitor via HDMI, SDI or CVBS ports.

## 3 Operation Guide


### 3.1. Operation Overview

This chapter provides information on how to operate the IRD through front panel and WEB UI. User can select the most proper operation method to set up the unit.

### 3.2. Powering Up and Initialization


Switch on the equipment through the rear power switch, and the unit is powered up and starts the initialization.

The LCD screen is lighted up, and display information as following:



H.264 SD/HD IRD  
Setting System...

The initialization takes about 20 seconds to complete, and then the IRD shows the IP address information as following:



H.264 SD/HD IRD  
IP: 192.168.001.098



REMARKS

**Before powering-up the device, make sure that all cabling is correctly connected (refer to chapter 3.4 of this manual). The device is correctly connected to the power inlet and grounded.**



TIPS

**If the unit fails to initialize and hangs at the “booting” stage, switching off the device and then powering up again may help. If the device still fails to initialize, please contact your service representative for help.**

### 3.3. Front Panel Operation

Ways of operation: use the 6 navigation keys on front panel: Up / Down / Left / Right / Menu / Ok to configure the IRD parameters. The configuration and settings are displayed through front panel LCD.

### 3.3.1 Front Panel Menu Structure

#### Front Panel Menu Structure

1 <sup>st</sup> Layer	2 <sup>nd</sup> Layer	3 <sup>rd</sup> Layer	
Status	Input Tuner 1/2	Lock Status	
		FEC	
		PER	
		Frequency Offset	
		Frequency Tune	
		TS Rate	
		RF Level	
		C/N	
		BER	
	Input ASI 1/2	Lock Status	
		TS Rate	
	Input IP 1/2	Lock Status	
		TS Rate	
	Decoder	TS Rate	
		PCR PID	
		Audio PID	
		Video PID	
		PMT PID	
		Program No.	
	CI	CI Slot 1/2	
	Output ASI	ASI 1 TS Rate	
		ASI 2 TS Rate	
	Output IP	IP 1 TS Rate	
		IP 2 TS Rate	

Inputs	Tuner 1/2	Tuner 1/2 Params	Enable
			TS Standard
			LNB Frequency
			Satellite Frequency
			Symbol Rate
			LNB Power Supply
			LNB 22KHz
			Scan TS
	ASI 1/2	Enable	
		TS Standard	
Scan TS			
IP	Local Setting		
	TSIP Channel 1/2		
Outputs	Decoder	Playing Program	TS Source
			Program List
		Video	Video Standard
			Aspect Ratio
			Video Format
		Audio	Audio Volume
			Audio Mixer
			Audio 1/2 Language
		Subtitle	Subtitle Standard
		Teletext	Teletext Standard
	ASI	ASI 1/2 TS Source	Tuner 1/2
			Mux 1/2
			ASI 1/2
	IP	TSIP Channel 1/2	Enable
TS Source			



			Dest IP Address
			Dest Port
			Protocol
			Time to Live
			TS Packet Number
			Enable Dest MAC
			Dest MAC
CA	Common Interface	CI 1/2	TS Source
		CAM Max Bitrate	Descrambling
	BISS Setting	BISS Setup	BISS Mode
			BISS-1 Setup
BISS-E Setup			
System	Local Setup	Local IP Address	
		Local Network Mask	
		Local Gateway	
		MAC Address	
		Version	
		Factory Setting	
		Reboot	

### 3.3.2 Front Panel Operation Guide

- **Enter “Menu”:**
  - Press “**MENU**” button to enter main menu.
- **Exit Menu/Back to parent Menu**
  - Upon completion of configuration settings, press “**MENU**” button until you go back to the Parent Menu.


- **Enter Sub-Menu**
  - Press **MENU** button to enter main menu.
  - Select a sub-menu by pressing arrow **UP** and arrow **DOWN** button.
  - Press **OK** button on the selected sub-menu.
  
- **To change parameter**
  - Step 1: Enter main menu by pressing **MENU** button.
  - Step 2: Scroll sub-menu by pressing arrow **UP** and arrow **DOWN** button, and press **OK** button to change the selected sub-menu.
  - Step 3: To change parameter settings, press arrow **RIGHT** and arrow **LEFT** button to move the cursor in which change must be made.
  - Press arrow **UP** button and arrow **DOWN** to input / select an appropriate setting, then press **OK** button to save.

### 3.4. **WEB UI Operation (Recommended)**

Accessing the equipment via Web can be very convenient for remote configuration of the equipment. Relative to the front panel settings WEB operation can provide a friendlier man-machine interface, and with less limits in space. WEB Management is recommended.

#### 3.4.1 WEB Management Connecting

##### Connection Instruction:

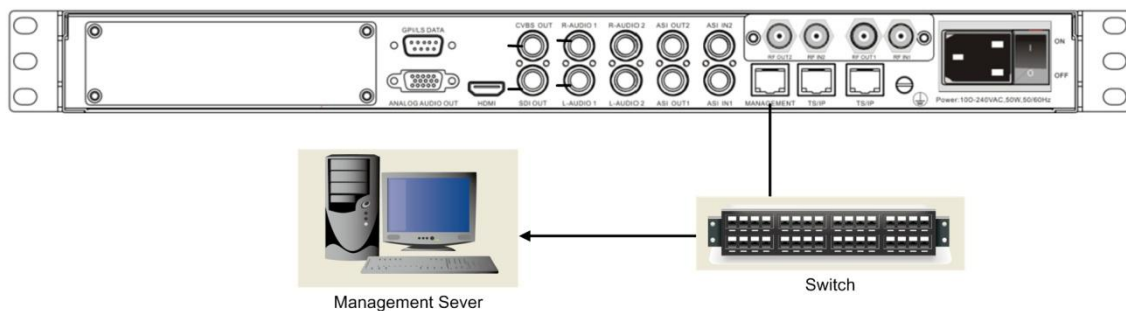

**PIC-3.4-1**

1. Connect the “MANAGEMENT” port of the IRD to a network switch and connect the management PC/server to the same network switch.
2. The IRD default IP address is 192.168.1.98. It is important to set the IP address of

the IRD and the monitoring servers in the same section to ensure a smoothly connection between them.

3. Open a web browser (e.g. Mozilla, internet explorer, safari and etc.), enter the equipment's IP address in format: **http://xxx.xxx.xxx.xxx** (xxx.xxx.xxx.xxx refers to IRD's IP address) and press ENTER button to confirm. The browser will attempt to connect to the device. If succeed, a login page will appear. (see PIC-3.4.2)

**Note: Through WEB browser, you can manage several pieces of HD IRD at the same time, as long as those equipments are connected to the server via Network Switch. Make sure that the equipment and server's IP address should be in the same section. Nevertheless, Subnet Mask and Gateway should be the same for both the server and the equipment.**



**PIC-3.4-2**

- To login, you need to enter the default username “**admin**” and password “**admin**”. Then click “Submit”.
- If the user name and password is correct, it will redirect to the main page.

## 3.4.2 Parameters Configuration

### 3.4.2.1 Main Page

The screenshot shows the 'H.264 SD/HD Receiver Decoder' interface. On the left is a 'Menu Area' with a tree view of settings. On the right is the 'Parameters Area' displaying various status tables. The tables include:

- Input Tuner1 Status:** Lock Status (Un-lock), BER (N/A), CN (0.00 dBc), RFLevel (0 dBm), Total TS Rate (0.00 Mbps), Effective TS Rate (0.00 Mbps), Frequency Tune (0.00 MHz), Frequency Offset (0 kHz), PER (N/A), FEC (Unknown).
- Input Tuner2 Status:** Lock Status (Un-lock), BER (N/A), CN (0.00 dBc), RFLevel (0 dBm), Total TS Rate (0.00 Mbps), Effective TS Rate (0.00 Mbps), Frequency Tune (0.00 MHz), Frequency Offset (0 kHz), PER (N/A), FEC (Unknown).
- Input ASI1 Status:** Lock Status (Un-lock), Total TS Rate (0.00 Mbps), Effective TS Rate (0.00 Mbps).
- Input ASI2 Status:** Lock Status (Un-lock), Total TS Rate (0.00 Mbps), Effective TS Rate (0.00 Mbps).
- Input IP1 Status:** Lock Status (Un-lock), Total TS Rate (0.00 Mbps), Effective TS Rate (0.00 Mbps).
- Input IP2 Status:** Lock Status (Un-lock), Total TS Rate (0.00 Mbps), Effective TS Rate (0.00 Mbps).
- Decoder Status:** Total TS Rate (108.00 Mbps), Effective TS Rate (0.00 Mbps), Program No (204), PCR PID (803), Video PID (803), Audio PID (612), PMT PID (1003).
- CI Status:** CI Slot1 (EMPTY), CI Slot2 (EMPTY).
- Output ASI Status:** ASI1 Total TS Rate, ASI1 Effective TS Rate, ASI2 Total TS Rate, ASI2 Effective TS Rate.

PIC-3.4-3

The main page can be divided into two functional areas:

- **Menu Area:** you can switch between the menus to display the corresponding parameter setting and monitoring pages.
- **Parameters Area:** displays the corresponding parameters pages according to the menu selection.

The WEB management page allows you to monitor and/or configure: Status, Receiver, Program Setup, CA, Local Setup, Alarms Setup, User Management, Preset, Upgrade, Log and etc.

#### Menu Area:

This area shows the main menu items of the machine, you can click the item you want to configure or monitor, then the detailed information will appear in the right area.

- Status
- ✦ Inputs
  - DVB-S/S2
  - ASI
  - IP
  - Backup Setting
- ✦ Outputs
  - Decoder
  - ASI
  - IP
- CA
- Program Mux Setting
- ✦ System
  - Local Setting
  - Import/Export
  - GPI Alarms Setting
  - User Management
  - License
  - Upgrade
  - Log
- Logout

**PIC-3.4-4**

**Parameters Area:**

This section is the main section for monitoring and configuration of the machine. It shows the detailed information of the machine of each menu. Its detailed function will be introduced in to following chapters.

### **3.4.2.2 Status Page**

This page allows you to monitor the status of input and output signal, and check the information of CI cards.

## H.264 SD/HD Receiver Decoder

Input Tuner1 Status									
Lock Status	BER	C/N	RFLevel	Total TS Rate	Effective TS Rate	Frequency Tune	Frequency Offset	PER	FEC
Un-lock	N/A	0.00 dBc	0 dBm	0.00 Mbps	0.00 Mbps	0.00 MHz	0 KHz	N/A	Unknown

Input Tuner2 Status									
Lock Status	BER	C/N	RFLevel	Total TS Rate	Effective TS Rate	Frequency Tune	Frequency Offset	PER	FEC
Un-lock	N/A	0.00 dBc	0 dBm	0.00 Mbps	0.00 Mbps	0.00 MHz	0 KHz	N/A	Unknown

Input ASI1 Status		
Lock Status	Total TS Rate	Effective TS Rate
Un-lock	0.00 Mbps	0.00 Mbps

Input ASI2 Status		
Lock Status	Total TS Rate	Effective TS Rate
Un-lock	0.00 Mbps	0.00 Mbps

Input IP1 Status		
Lock Status	Total TS Rate	Effective TS Rate
Un-lock	0.00 Mbps	0.00 Mbps

Input IP2 Status		
Lock Status	Total TS Rate	Effective TS Rate
Un-lock	0.00 Mbps	0.00 Mbps

Decoder Status						
Total TS Rate	Effective TS Rate	Program No.	PCR PID	Video PID	Audio PID	PMT PID
108.00 Mbps	0.00 Mbps	204	803	803	612	1003

CI Status	
CI Slot1	CI Slot2
EMPTY	EMPTY


Output ASI Status			
ASI1 Total TS Rate	ASI1 Effective TS Rate	ASI2 Total TS Rate	ASI2 Effective TS Rate

PIC-3.4-5

- **Input status (tuner/ ASI/ IP):** It shows the main information of input streams, such as lock status, RF BER, RF Level, Total RF Rate , ASI total rate, ASI effective rate etc.
- **Decoder status:** Here you can see the decoder information: video PID, Audio PID and PMT PID.
- **CI status:** You are able to monitor the status of CI cards.
- **Output status (ASI/ IP):** You can check the output TS rate and the TS status.

### 3.4.2.3 Programs Mux Setting

If you want to configure the parameters of multiplexed programs, just click the “programs Mux Setting” button on the left bar. Then you will turn to the programs information interface, where you are able to check and modify the parameters of programs.

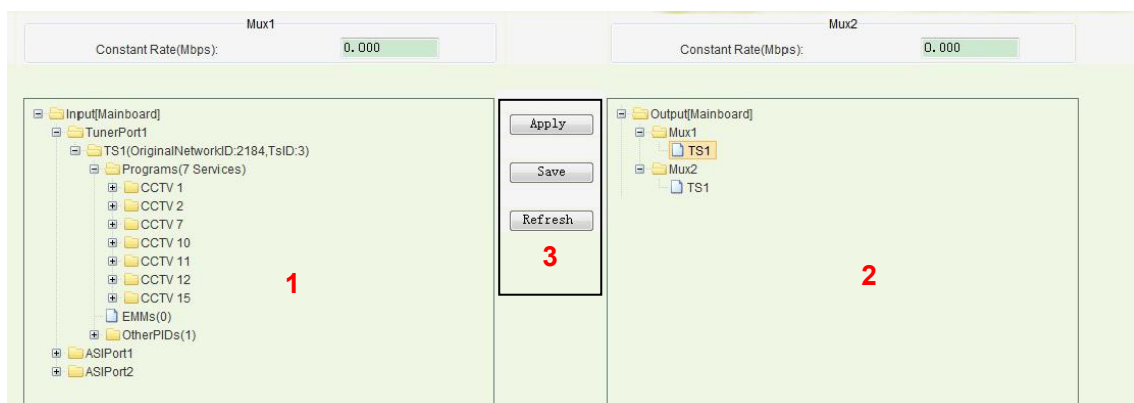

PIC-3.4-6

① **Input Program Configuration:** The “Input Program Configuration” is on the left side of the window. It displays the entire information of the received input streams

② **Output Program Configuration:** In the “Output Program Configuration” window, it shows the ports which can be set to transmit output stream. The programs set to be outputted are shown in the submenu of each port.

③ **Operation Buttons:** This area contains three functional buttons: Refresh, Apply and Save.


**Apply:** to make the programs configuration take effect. Once the device is powered off, the programs configuration will lose and device will be restored to the last saved configuration.

**Save:** to make the programs configuration take effect as well as save the configuration information.

**Refresh:** by clicking this button to refresh the programs information.

### How to dispose the Inputs:


To get the input programs, you should choose the sub-menu in the Inputs menu on the left. Then it will turn to the corresponding page where you are able to set the receiving parameters to lock the signals. (Referring to **chapter 3.4.2.4**) If the signal is locked then programs information will be listed on the frame as the following picture shows.

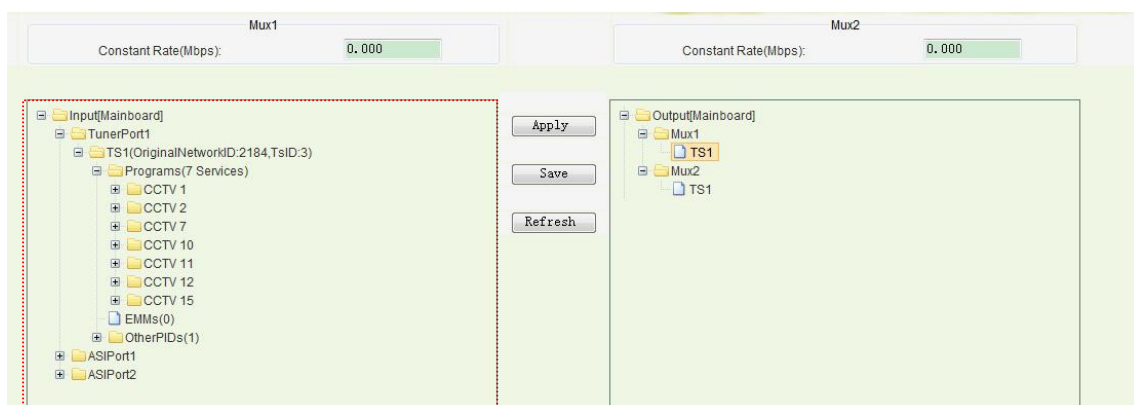

PIC-3.4-7


### How to configure the Outputs (Mux1 and Mux2):

Firstly, select the port which you want to transmit the output stream. Right click the TS in that port and a pop-up menu will appear. Click “ADD TS” item and you will get the input box.

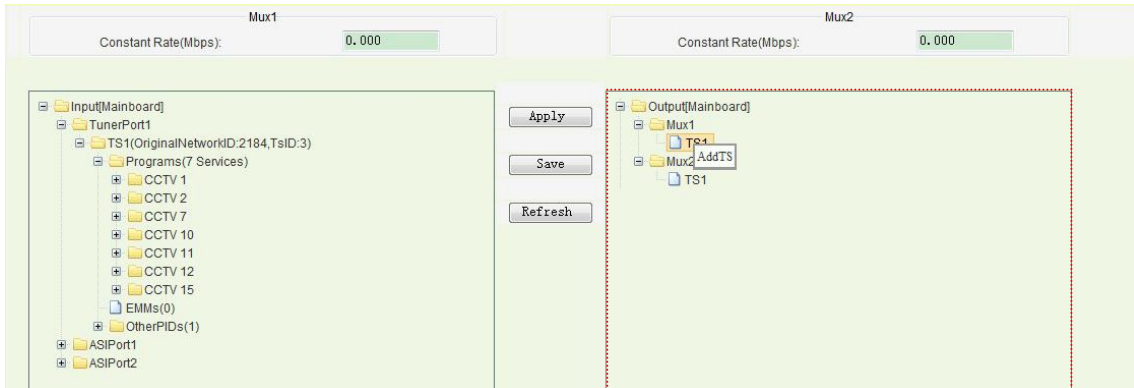

**PIC-3.4-8**

Secondly, Input the “Original Network ID” and “TS ID” for the channel, and click the “OK” button. Then new “Original Network ID” and “TS ID” will be assigned to the selected output TS (channel).

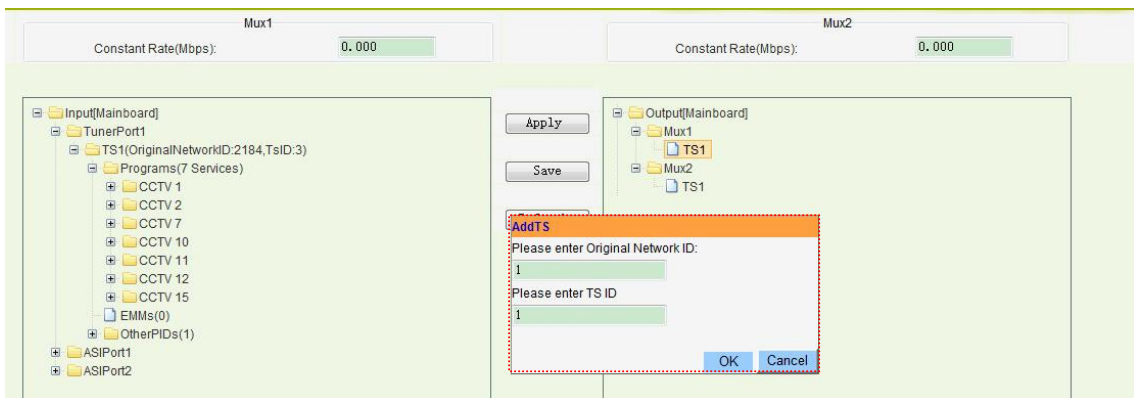


**PIC-3.4-9**

Additionally, by clicking the editing icon, you are able to modify the TS name, network ID and TS ID.


To delete existing TS, you can click the cross icon as follows:



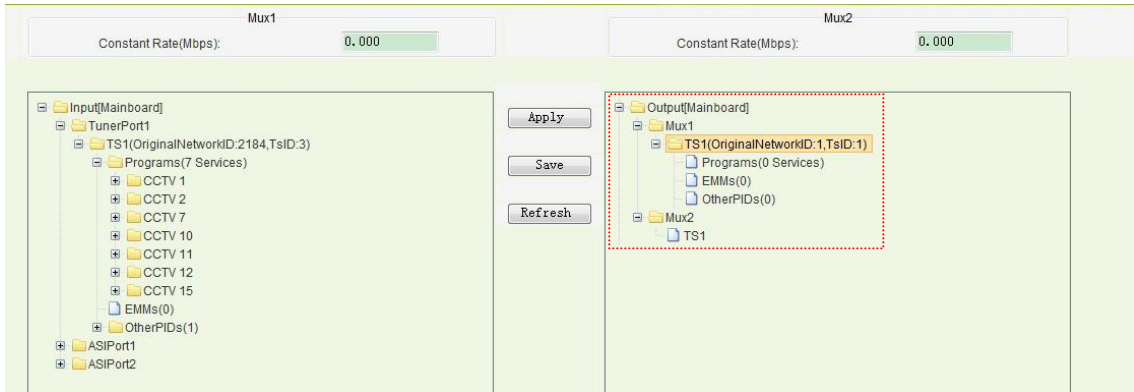

**PIC-3.4-10**

And it is able to delete the TS or programs in the Mux menu by click the cross icon at the behind of the program or TS. Shown as the following picture:

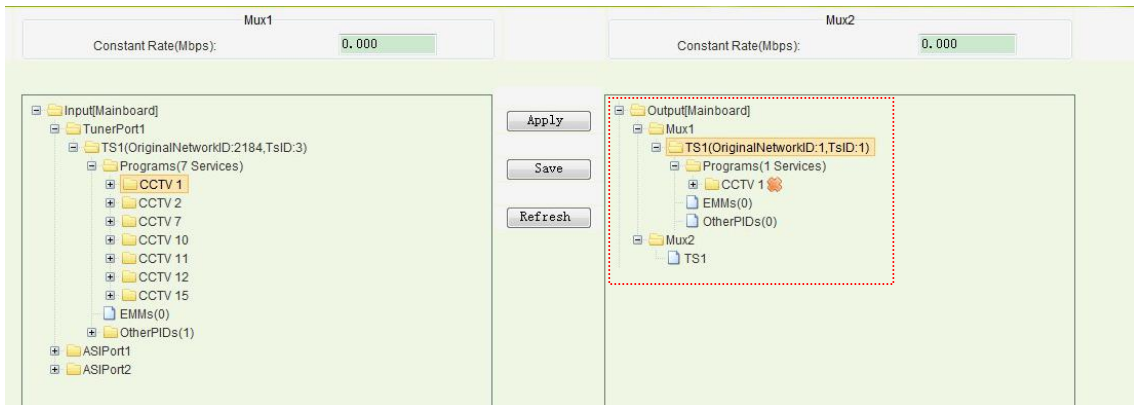

**PIC-3.4-11**



**REMARKS** After completing the configuration, you should click “Apply” button to enforce it or “Save” button to enforce and save it.



**REMARKS** The outputs ( Mux1 and Mux2) will be available for ASI/ IP inputs after configuration.

## 3.4.2.4 Inputs

- DVB-S/S2

The screenshot displays the 'H.264 SD/HD Receiver Decoder' interface. It is divided into two main sections for Tuner1 and Tuner2. Each tuner section contains a set of configuration parameters: 'Enable' (On/Off dropdown), 'Satellite Frequency(MHz)' (text input), 'Symbol Rate(KBaud)' (text input), 'LNB Frequency(MHz)' (text input), 'LNB Power Supply' (18V (H) dropdown), 'LNB 22KHz' (On/Off dropdown), and 'TS Standard' (DVB dropdown). A 'Submit' button is located between the two tuner sections, and a 'Refresh' button is below it. Below the tuner settings are two tables for 'Services On Tuner1' and 'Services On Tuner2', each with columns for 'Service ID' and 'Service Name'. 'ScanTS(Tuner1)' and 'ScanTS(Tuner2)' buttons are positioned between these tables. Three red dashed boxes highlight specific areas: 'Area 1' covers the Tuner1 settings, 'Area 2' covers the Tuner2 settings, and 'Area 3' covers the 'Services On Tuner2' table.

PIC-3.4-12

**Area 1/ Area 2:** Additionally, in this section, you are able to set the dual RF receiver parameters including the Satellite Frequency, Symbol Rate, LNB Frequency, and LNB Voltage (Polarization) with accurate values. Then you can press the “Submit” button to save your settings or click “Refresh” button to refresh the screen.

**Area 3:** When the signal is locked, it is able to get the program list in by clicking the ScanTS (Tuner1/Tuner2).

- **Enable:** Enable or disable corresponding input channel
- **Satellite Frequency (MHz):** set the satellite down conversion frequency. You can get this parameter from the satellite program provider.
- **Symbol Rate (KBaud):** set the correct symbol rate. You can get this parameter from the satellite program provider.
- **LNB Frequency:** this is the LNB’s local oscillation (LO) frequency, every LNB have one or two oscillation frequencies which can be obtained from the LNB provider, or you can check on the LNB label. The value is between 5000 and 6000.

- **LNB Power Supply:** LNB voltage is the power that supply to the LNB in order to receive satellite signal with different polarization. Generally 18V is for Horizontal while 13V is for Vertical.
- **LNB 22 KHz:** Generally this is used to control 22KHz switch, typically used for LNB with double L.O. in Ku band. “ON” is for high L.O and “OFF” is for low L.O.
- **TS Standard:** there are two options for TS standards: DVB and ATSC.



**TIPS** Sometimes the parameters may change; it is advisable to check through [www.lyngsat.com](http://www.lyngsat.com) for the updated satellite parameters.

- **DVB-T/T2 (Optional)**


If the tuner is for DVB-T/T2 receiving, it will turn to the above interface when clicking the inputs menu. This page is to configure the parameters of DVB-T/T2 receiving. There are three parameters as following:

- **Mode:** to set DVB-T or DVB-T2 receiving.
- **Frequency:** to input the frequency that the receiver is appointed to receiving..
- **Bandwidth:** There are three options: 6M/7M/8M. Set the corresponding parameter according to the operator requirement.

- **DVB-C (Optional)**

**Regarding DVB-C parameters, user only needs to input the frequency, symbol rate and QAM mode to scan and receive the input signal.**

- **ASI**

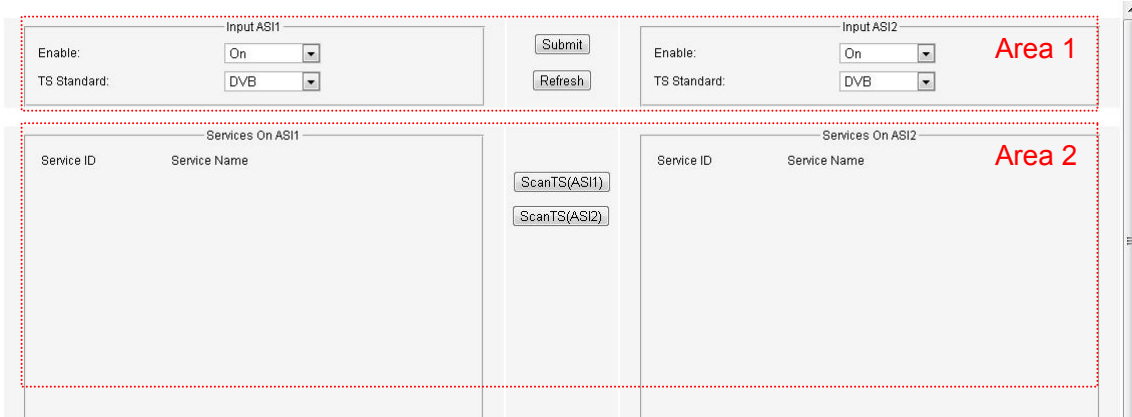

**PIC-3.4-13**

This page shows the Input ASI information. There are two channels available to receive ASI streams: ASI1 and ASI2.


**Area1:** set the ASI parameters, include Enable and TS Standard.

**Enable:** enable / disable the ASI channel to receive input stream.

**TS Standard:** select the correct TS standard: DVB or ATSC

**Area2:** displays the programs list of the input stream. You can get the programs list by clicking the ScanTS (ASI1) and ScanTS (ASI2).

- **IP**

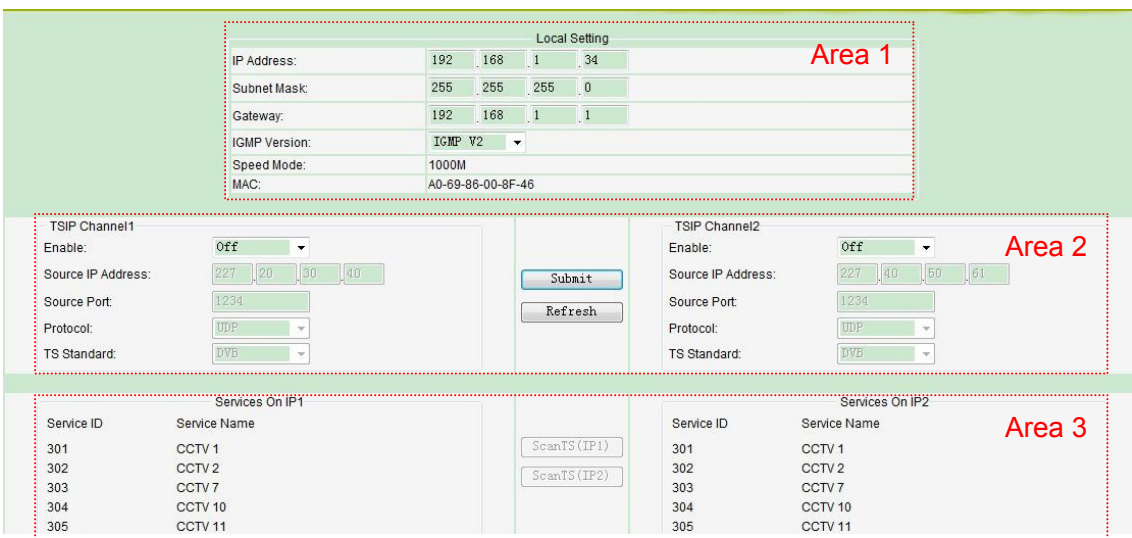

**PIC-3.4-14**

From this page, you can setup the device's local IP parameters (Area1) as well as the TSIP ports' output parameters (Area2 and Area3). There are two TSIP channels available for

receiving IP streams.

**Area1:** Set the devices' local IP parameters to enable it to be connected into the network:

- **IP Address:** Local IP setting for connecting to the server. This IP and the management server's IP should be in the same section.
- **SubnetMask:** Network Mask setting for connecting to the server. It should be the same as management server: 255.255.255.0
- **GateWay:** Gateway setting for connecting to the server. It should be the same as the management server.
- **IGMP Version:** The IP transmission supports IGMP V2 and IGMP V3, you can choose the one you need manually.

**Area2:** The parameter of channel 1 and channel 2. After finishing the configuration, click "Submit" to make it into effect.

- **Enable:** Enable or disable corresponding output channel
- **Source IP Address:** it is the IP address of the source IP streams.
- **Source Port:** It is the port of source IP streams.
- **Protocol:** You can choose UDP or RTP for multicast/unicast.

**Area3:** To get the program list of IP input by clicking ScanTS (Tuner1) / ScanTS (Tuner2).

- **Backup Setting**

H.264 SD/HD Receiver Decoder

Input Stream1 Backup Setting

Main Input: Tuner1

Backup Input: None

Input Stream2 Backup Setting

Main Input: Tuner2

Backup Input: None

Submit Refresh

**PIC-3.4-15**

In the Backup Setting page, user can set redundant sources for the main input signal. The main and backup input source can be selected from Tuner, ASI or IP.

In case there is any error for the main input signal, the IRD will automatically switch the input from main to the backup, to ensure the IRD output non-stop.

### 3.4.2.5 Outputs

- **Decoder**

In this page, user can view and configure the decoding output program parameters, including: Program, CAM, Video, Audio, Subtitle and Teletext.

**PIC-3.4-16**



**REMARKS**

The device can decode the input streams and output by CVBS or HDMI. For each time only one program can be decoded and output.



**TIPS**

The parameters set in “Program Setup” interface work for all selected program.

◇ **Playing Programs:**

This interface, all the programs received will be listed in “TS Source” region. By changing the program’s operation, you can determine which program to decode.

**PIC-3.4-17**

If the input signal is not locked and searched, the “program” section shows empty. User

cannot do any setup at the moment.

✧ **Video:**

Here, you can configure the video parameter, as follows:

Video	
Video Standard:	Automatic
Aspect Ratio Conversion:	Automatic
Video Output Resolution:	Automatic

**PIC-3.4-18**

- **Video Standard:** in this item, you can select video standard, available options include: Automatic, SECAM, NTSC, PAL-N, PAL-M and PAL.
- **Aspect Ratio Conversion:** you can setup the aspect ratio for the decoded programs, available options include: Pillarbox (Side Bars), 16:9 Pan and Scan, 4:3 LetterBox, and 4:3 Pan and Scan.
- **Video Output Resolution,** you can select the video format (resolution) for the decoded program, available options include:  
Auto / 480i / 576i / 720p50 / 720p59 / 720p60 / 1080i50 / 1080i59 / 1080i60.



**TIPS** The decoder output video resolution should meet with the monitor resolution setting.

✧ **Audio:**

In this section, you can configure the information of Audio, as follows:


Audio	
Audio Volume[-63,0](dB):	0
Mixer:	Stereo
Audio 1 Preferred Language:	No Audio (0x0000)
Audio 2 Preferred Language:	No Audio (0x0000)

**PIC-3.4-19**

- **Audio Volume:** Set the output audio level from -63 to max. 0 in dB.
- **Mixer:** set the format of audio, including Stereo, Left, Right, Mono and Dual.
- **Audio1/2 Preferred Language:** Select audio language if there are multiple audios contained in the signal.
- AAC audio decoding is only supported when DVB-S2 Tuner is installed and

shipped to Europe.

✧ **Subtitle:**

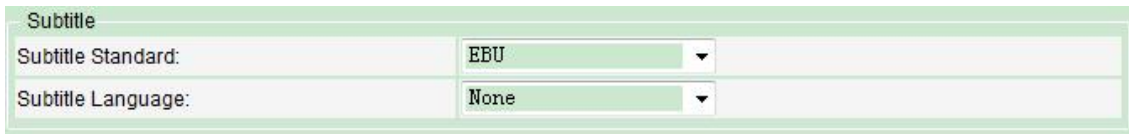

The screenshot shows a configuration window titled "Subtitle". It contains two rows of controls. The first row is labeled "Subtitle Standard:" and has a dropdown menu with "EBU" selected. The second row is labeled "Subtitle Language:" and has a dropdown menu with "None" selected.

**PIC-3.4-20**


- **Subtitle Standard:** You can set the subtitle to be EBU or DVB.

EBU: The European Broadcasting Union is the world's foremost alliance of public service media entities

DVB: It means Digital Video Broadcasting, a set of standards relating to digital television

- **Subtitle Language:** Here you can set the language of subtitle from the existing selections.

✧ **Teletext**

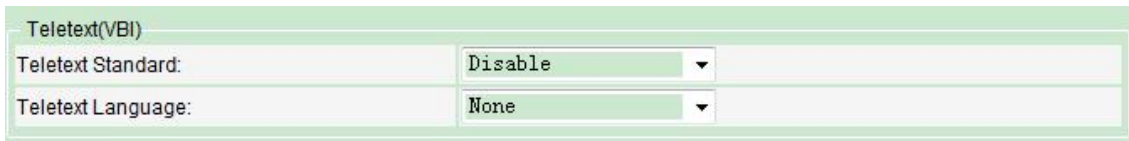


The screenshot shows a configuration window titled "Teletext(VBI)". It contains two rows of controls. The first row is labeled "Teletext Standard:" and has a dropdown menu with "Disable" selected. The second row is labeled "Teletext Language:" and has a dropdown menu with "None" selected.

**PIC-3.4-21**

- **Teletext Standard:** choose disable to turn off the Teletext or enable to turn on the Teletext.
- **Teletext Language:** You can set the teletext language here.

● **ASI**

In this page you are able to choose the input signal from Tuner, ASI, IP or Mux as signal source for the ASI output. After configuration you need to click submit button to make it taking effect immediately.

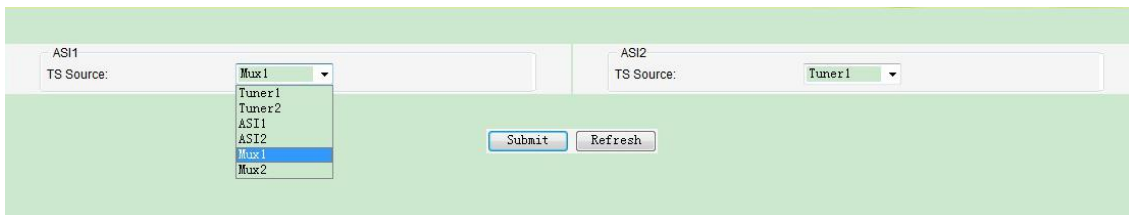

The screenshot shows a configuration interface for ASI. It has two sections: "ASI1" and "ASI2". Under "ASI1", there is a "TS Source:" label and a dropdown menu with "Mux1" selected. Under "ASI2", there is a "TS Source:" label and a dropdown menu with "Tuner1" selected. Below these sections are two buttons: "Submit" and "Refresh".

**PIC-3.4-22**





REMARKS

Only the Enabled Input will be listed on the TS source list.

### ● IP

In this page, you can set up the parameter of IP output. There are two channels for output and you can set both of them.

The screenshot displays a configuration page for IP output, divided into two columns for Channel1 and Channel2. Each channel has the following settings:

- Enable:** A dropdown menu set to 'On'.
- TS Source:** A dropdown menu set to 'Tuner1'.
- Dest IP Address:** A text input field containing '227.10.20.80' for Channel1 and '227.10.20.81' for Channel2.
- Dest Port:** A text input field containing '1234'.
- Protocol:** A dropdown menu set to 'UDP'.
- Time To Live:** A text input field containing '128'.
- TS Packet Number:** A text input field containing '7'.
- Enable Dest MAC:** A dropdown menu set to 'Off'.
- Dest MAC:** A text input field containing '00.00.00.00.00.00'.


At the bottom of the form, there are two buttons: 'Submit' and 'Refresh'.

PIC-3.4-23

- **Enable:** Enable or disable corresponding output channel
- **TS Source:** to choose the input signal as IP output.
- **Dest IP Address:** The IP address for the multicast/unicast.
- **Dest Port:** The port of the multicast/unicast, it must stay same with the value of the dest device.
- **Protocol:** You can choose UDP OR RTP for multicast/unicast.
- **Time to Live:** Range is 1-255. (Num 8 is recommended)
- **Enable Dest MAC:** You can decide whether to set the MAC of destination device.

### 3.4.2.6 CA

In this page, user can manage the configuration setting related to the device decryption and descrambling capability.

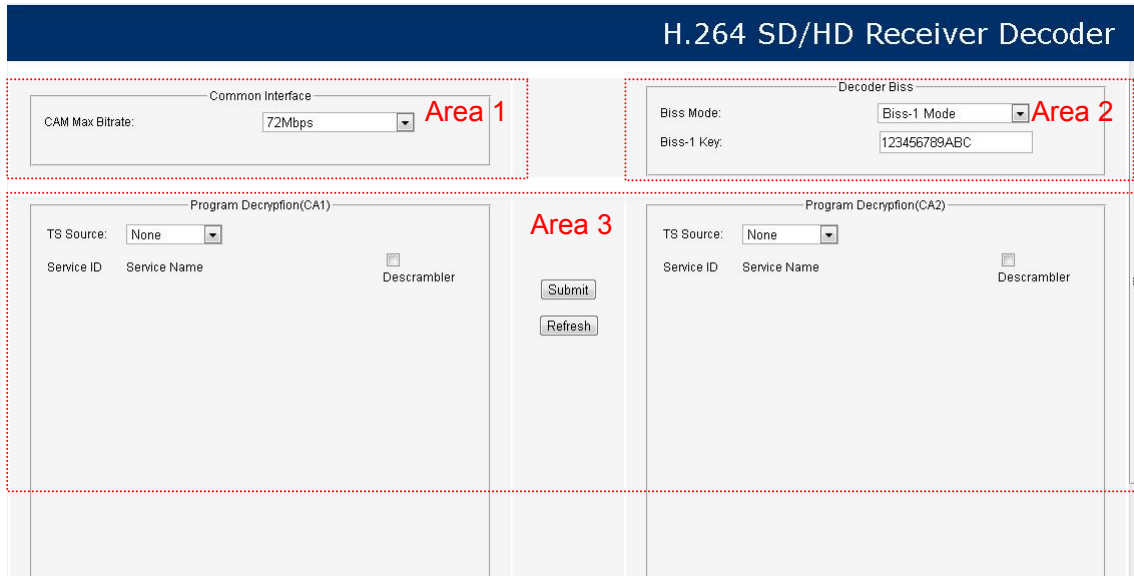

PIC-3.4-24

**Area1:** this area is for CAM bit-rate setting, where you can set the maximum bit rate according to the CAM inserted.

**Area2:** This area is for the Biss setting.

- **BISS (Basic Interoperable Scrambling System):** is a satellite signal scrambling system developed by the European Broadcasting Union and a consortium of hardware manufacturers. There are two types:
  - **BISS-1**, transmission are protected by a 12 digit hexadecimal “session key” that is agreed by the transmitting and receiving parties prior to transmission. The key is entered into both the encoder and decoder, this key then forms part of the encryption of the digital TV signal and any receiver with BISS-support with correct key will decrypt the signal.
  - **BISS-E (E for encrypted)**, is a variation where the decoder has stored one secret BISS-key entered by for example a rights holder. This is unknown to the user of the decoder. The user is then sent a 16-digit hexadecimal code, which is entered as a “session key”. This session key is then mathematically combined internally to calculate a BISS-1 key that can decrypt the signal.
  - **BISS-E ID**, an identification ID given prior to transmission and reception.

**Area3:** In this area, it is able to choose the programs that need to be descrambled and set the CAM info. All the received signals will be listed in the “TS Source” menu. Then you can choose the programs that you want to descramble on the program list and click the “Submit” button to make it into effect.

- **TS Source:** to choose the input signal as IP output.



**REMARKS** Usually a standard CAM can support a certain data processing unless it has instruction for higher bit rate support. Selecting a wrong CAM output bit rate will cause video mosaic issue because the actual processed data exceeds the CAM Max handling capability.

## 3.4.2.7 System

- **LocalSetup**

**H.264 SD/HD Receiver Decoder**

Local Setting				
IP Address:	192	.168	.2	.98
Subnet Mask:	255	.255	.255	0
Gateway:	192	.168	.1	.1
Trap IP Address1:	0	0	0	0 <input type="checkbox"/> Enable
Trap IP Address2:	0	0	0	0 <input type="checkbox"/> Enable
Language:	English <input type="button" value="v"/>			
Mac Address:	A0-69-86-00-B2-1D			
Software Version(Main Board)	V2H.1.25			
Software Version(@QAM(A/C)[2])	V55.0.0			

**PIC-3.4-25**

In this page, you are able to configure the following parameters:

- **IP Address:** Local IP setting for connecting to the server. This IP and the management server's IP should be in the same section.
- **Network Mask:** Network Mask setting for connecting to the server. It should be the same as management server: 255.255.255.0
- **Gateway:** Gateway setting for connecting to the server. It should be the same as the management server.
- **Trap IP Address:** This IP should be the same as the monitoring server's IP. After correct setup, the IRD will pass the alarming and running information to the monitoring server.
- **Language:** to configure the UI displaying language.

- **Import/Export**

This menu is for user to import/export the machine configuration file.

- **GPI Alarms**

## H.264 SD/HD Receiver Decoder

GPI Alarms			
	GPI1	GPI2	Alarm Mask
LNB connection short:	Off	Off	Off
Signal unlock:	Off	Off	Off
CAM descrambling doesn't work:	Off	Off	Off
CAM communication error:	Off	Off	Off

### PIC-3.4-26

In this section, user can set the alarm information to monitor the device and signal. After setting the “Alarm Mask” on, the “GPI” item will be available to be set as On or Off. If the GPI is set to on, when there are LNB Disconnect, Signal unlocked or CAM error, the alarm information will be sent out via GPI.

- **User Management**

## H.264 SD/HD Receiver Decoder

User Management	
<input checked="" type="radio"/> Change Password	<input type="radio"/> Change User Name
<input type="radio"/> Create A User	<input type="radio"/> Delete A User
User Name:	<input type="text"/>
Password:	<input type="password"/>
New Password:	<input type="password"/>
Confirm New Password:	<input type="password"/>

### PIC-3.4-27

- **Change Password:**

When user put a check on this button, user can change the password with a new one.

- **Change Username:**

Here, you can change the existed username to a new one.

- **Create a User:**

The device allows you to add up to 10 new users to operate the device. You can set the new username and password after select “Create a User” button.

- **Delete a User:**

By selecting this section, you are able to delete the user account from the existing account. If the user account is deleted, the user will have no right to access the device.


- **License**

Slot	Chip ID	Board Type	HW Version	Tag Len	License Info	Last Update Time
6	0x339f919b04000057	MainBoard	1	82	bf010ca0698600b21da06986...	2014-4-9

**PIC-3.4-28**

This menu is for licensing control on the machine. User can purchase upgrade package from service provider to extend the machine function and capability. User shall check with service provider first whether the on-hand machine supports license upgrade or not.

- **Upgrade**

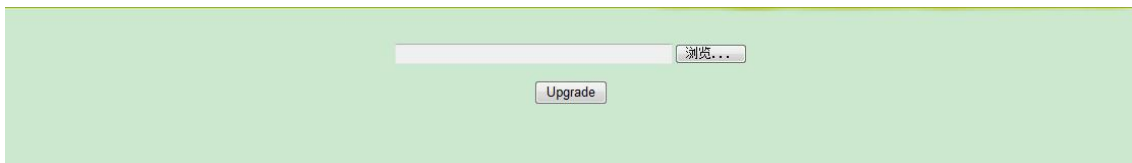

**PIC-3.4-29**

Click Browse button, then user can select the upgrade file, and click “Upgrade” button to start the upgrade. If succeed, restart the device and it will load the new version

- **Log**

In this page user can export and review the log of the machine.

- **LogOut**



**PIC-3.4-30**

User can logout the management system by clicking this button.

### **3.5. Preparation before Officially Operation**

This section advises what need to be performed on the IRD before formally starts operation.

It includes but not limited to the following:

- Clear test data
- Configure the equipment with working data.
- Routing inspection.

### **3.5.1 Clear all useless data**

To do a factory default setting on the device in order to clean up all test data generated in the process of debugging and testing.

### **3.5.2 Configure the equipment with working data**

According to the formal system plan to configure the IRD from signal input, descramble and decoding output.

### **3.5.3 Full checking before implementation**

After completion of the test and configuration, users are recommended to give the equipment a final full-scale checking to ensure everything is on track for working with long-term stability. It shall contain (but not limited to) the following items :

- Check the strength and quality of all input signals.
- Check if there is any alarm lights up on front panel LED indicator.
- Check whether the cable connection is in good condition with each external device.

## 4 FAQ

Problem	Possible Reasons	What to do
The LCD display on the front panel does not light up.	No power.	Check whether the power cord is plugged into the power socket.
No Video output	Parameters are not properly configured.	Check the parameters configuration
	No signal	Check the source and other factors that affect the signal reception.
	The TV set is not tuned to the right TV mode.	Set TV in right mode, e.g. (Set TV to CVBS display mode for CVBS decoding input from IRD, and HDMI mode for IRD HDMI input, etc.)
No or bad signal.	No cable connection or the program does not exist in current satellite.	Check the cable connections, LNB and other equipment connected between the LNB and the STB, and /or adjust the dish.
	The satellite dish is not properly oriented to the satellite.	Align the dish. Check the signal level in the IRD menu.
Bad picture / Blocking error.	The satellite dish is not properly oriented to the satellite.	Align the dish.

<b>Problem</b>	<b>Possible Reasons</b>	<b>What to do</b>
	Signal is too strong.	Connect a signal attenuator to the LNB input.
	Signal is too weak.	Change to a larger dish.
	LNB noise figure is too high.	Change a LNB with lower noise figure.
	The LNB is defective	Change a LNB.
Signal is good. But No picture and no audio on decoding output	The picture and audio are scrambled.	Insert correct CAM and authorized smart card to descramble the programs.
Cannot have access to the IRD through WEB UI	IP setting	Check whether the management PC IP and the IRD IP have been set to be in same section.
	Network cable problem	Make sure the cable is good one and connect well to the IRD management port.
Cannot Decrypt Programs.	Haven't selected decrypted programs or select incorrectly.	Select decrypted programs to be correctly.
	CAM Modular Error.	Change for another CAM.
	Smart Card no authorization	Change for an authorized smart card
	Incorrect insertion of CAM or Smart card.	Correctly insert CAM and Smart card.



## 5 Terminology

<b>A - Z</b>	
<b>Abbreviation</b>	<b>Specific Meaning</b>
<b>AES</b>	Audio Engineering Society
<b>ASI</b>	Asynchronous Serial Interface
<b>BISS</b>	Basic Interoperable Scrambling System
<b>BNC</b>	Bayonet Nut Connector
<b>CI</b>	Common Interface
<b>CVBS</b>	Composite Video Broadcast Signal
<b>DVB</b>	Digital Video Broadcast
<b>DVB-C</b>	DVB-Cable
<b>DVB-S/S2</b>	DVB-Satellite
<b>DVB-T</b>	DVB-Terrestrial
<b>EBU</b>	European Broadcasting Union
<b>ETSI</b>	European Telecommunications Standards Institute
<b>FEC</b>	Forward Error Correction
<b>HD</b>	High Definition
<b>HDMI</b>	High Definition Multimedia Interface
<b>ISO</b>	International Standard Organization
<b>ITU</b>	International Telecommunications Union
<b>LNB</b>	Low Noise Block
<b>MPEG</b>	Moving Pictures Experts Group
<b>PCMCIA</b>	Personal Computer Memory Card International Association
<b>RTP</b>	Real-time Transport Protocol
<b>SD</b>	Standard Definition
<b>SDI</b>	Serial Digital Interface
<b>TS</b>	Transport Stream
<b>UDP</b>	User Datagram Protocol